

# JW-HD108N-R3

n-type Bifacial Dual-Glass Black Frame Module

## 430-455W



**455W**  
Maximum Power Output

**22.77%**  
Maximum Module Efficiency

**0~+3%**  
Power Output Tolerance



### 10-30% Additional Power Generation

30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



### ZERO LID (Light Induced Degradation)

n-type solar cell has no LID naturally which can increase power generation



### Higher Reliability

New generation TOPCon technology for the battery, featuring no web coating, no current leakage, and reater resistance to hot spots.



### Better Weak Illumination Response

Higher power output even under low-light environments like on cloudy or foggy days



### Better Temperature Coefficient

Lower temperature coefficient (-0.30%) and lower working temperature, resulting in more power.




### Wider Applicability

More application scenes like BIPV, vertical installation, snowfield, high-humid, windy and dusty area



IEC61215(2021), IEC61730(2023), IEC61701, IEC62716  
 ISO9001:2015: Quality Management System  
 ISO14001:2015: Environment Management System  
 ISO45001:2018: Occupational health and safety management systems  
 IEC62941: 2019: Quality system for PV module manufacturing

### Linear Performance Warranty

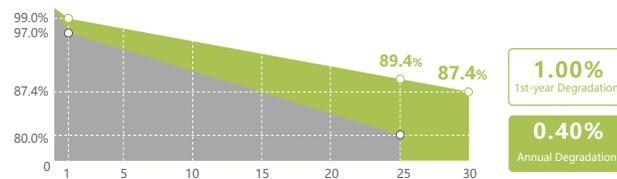

25 Years Product Material & Workmanship / 30 Years Linear Performance Warranty

Standard Module Linear Performance Warranty | Jolywood n-type Bifacial Dual-Glass Module Linear Performance Warranty

Version 2024.03 ©Jolywood (Taizhou) Solar Technology Co., Ltd. All rights reserved.



JOLYWOOD (TAIZHOU) SOLAR  
 TECHNOLOGY CO.,LTD.  
 www.jolywood.cn

Add: No.6 Kaiyang Rd., Jiangyan Economic Development  
 Zone, Taizhou, Jiangsu Province, China, 225500  
 TEL: +86 523 80612799 Email: mkt@jolywood.cn



### Electrical Properties | STC\*

Testing Condition	Front Side					
Peak Power (Pmax) (W)	430	435	440	445	450	455
MPP Voltage (Vmp) (V)	32.97	33.15	33.33	33.51	33.69	33.87
MPP Current (Imp) (A)	13.04	13.12	13.20	13.28	13.36	13.43
Open Circuit Voltage (Voc) (V)	38.37	38.57	38.77	38.97	39.17	39.37
Short Circuit Current (Isc) (A)	13.86	13.93	14.00	14.07	14.14	14.21
Module Efficiency (%)	21.52	21.77	22.02	22.27	22.52	22.77

\*STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, AM1.5  
The data above is for reference only and the actual data is in accordance with the practical testing Power Measurement Tolerance ±3%

### Electrical Properties | NMOT\*

Testing Condition	Front Side					
Peak Power (Pmax) (W)	322	326	330	333	337	341
MPP Voltage (Vmp) (V)	31.57	31.74	31.91	32.08	32.26	32.43
MPP Current (Imp) (A)	10.20	10.27	10.33	10.39	10.45	10.51
Open Circuit Voltage (Voc) (V)	36.74	36.93	37.12	37.32	37.51	37.70
Short Circuit Current (Isc) (A)	11.19	11.25	11.30	11.36	11.42	11.47

\*NMOT: Irradiance 800 W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1 m/s

### Electrical Properties Under Different Rear Gain | HD108N-450

Power Gain (%)	Peak Power (Pmax) (W)	MPP Voltage (Vmp) (V)	MPP Current (Imp) (A)	Open Circuit Voltage (Voc) (V)	Short Circuit Current (Isc) (A)
10	495.00	33.69	14.69	39.17	15.55
15	517.50	33.69	15.36	39.17	16.26
20	540.00	33.69	16.03	39.17	16.96
25	562.50	33.79	16.65	39.27	17.63
30	585.00	33.79	17.31	39.27	18.33

### Operating Properties

Operating Temperature (°C)	-40°C~+85°C
Maximum System Voltage (V)	1500V DC (IEC)
Maximum Series Fuse Rating (A)	30
Bifaciality*	80%
Front Static Load	Snow load 5400Pa, Wind load 2400Pa

\*Bifaciality = Pmaxrear (STC) / Pmaxfront (STC), Bifaciality tolerance: ±5%

### Temperature Coefficient

Temperature Coefficient of Pmax*	-0.300%/°C
Temperature Coefficient of Voc	-0.250%/°C
Temperature Coefficient of Isc	+0.045%/°C
Nominal Operating Cell Temperature (NOCT)	42±2°C


\*Temperature Coefficient of Pmax: ±0.03%/°C

### Mechanical Properties

Number of Cells	108pcs
Module Dimension	1762mm*1134mm*30mm
Weight	24.6kg
Front / Rear Glass*	2.0mm/2.0mm Heat strengthened glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 (3 diodes)
Length of Cable	4.0mm <sup>2</sup> , +1300mm/-1300mm (Cable length can be customized)
Packaging Configuration	36pcs/Pallet, 936pcs/40'HQ

\*The specification and key features described in this datasheet may deviate slightly and aren't guaranteed. Due to ongoing innovation, R&D enhancement, Jolywood (Taizhou) Solar Technology Co., Ltd. reserves the right to make any adjustment to the information described herein at any time without notice. Please always obtain the most recent version of the datasheet which shall be duly incorporated into the binding contract made by the parties governing all transactions related to the purchase and sale of the products described herein.

### Engineering Drawing (unit: mm)

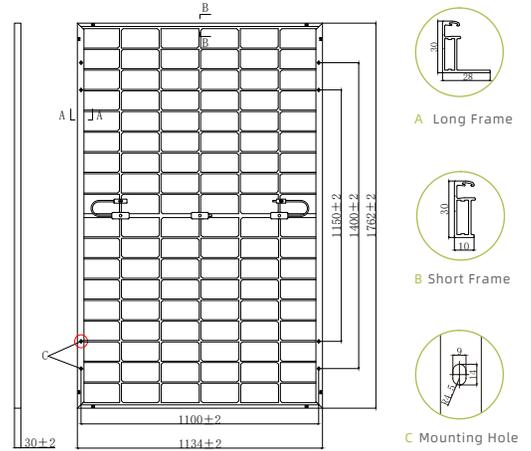

### Characteristic Curves | HD108N-450

